

FEATURES


- Compact flat type (Height: 11.2mm .441inch)
- Compact and high-capacity 30A load switching.
- Sealed type

TYPICAL APPLICATIONS

Head lamp, Fog lamp, Fan motor, EPS, Defogger, Seat heater, etc.

RoHS compliant

ORDERING INFORMATION

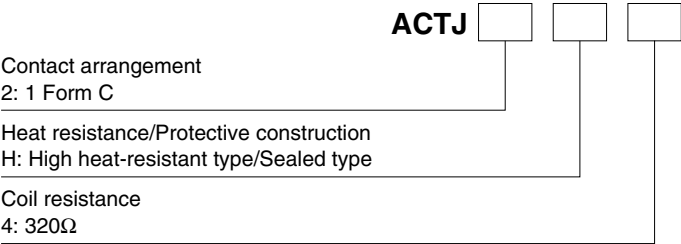

TYPES

Contact arrangement	Nominal coil voltage	Coil resistance	Part No.
			Heat resistance: High heat-resistant type
1 Form C	12V DC	320Ω	ACTJ2H4

Standard packing; Carton (tube): 40 pcs.; Case: 800 pcs.
Note: Please contact us for details about products other than those above.

RATING

1. Coil data

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power (at 20°C 68°F)	Usable voltage range
12V DC	Max. 7.0V DC (Initial)	Min. 0.8V DC (Initial)	37.5 mA	320Ω	450 mW	10 to 16V DC

2. Specifications

Characteristics	Item	Specifications
Contact	Arrangement	1 Form C
	Contact resistance (Initial)	N.O.: Typ2.5mΩ, N.C.: Typ3mΩ (By voltage drop 6V DC 1A)
	Contact material	Ag alloy (Cadmium free)
Rating	Nominal switching capacity (resistive load)	N.O.: 30A 14V DC, N.C.: 15A 14V DC
	Max. carrying current (12V DC initial)*3	30A for 1 hour (at 20°C 68°F)
	Nominal operating power	450 mW (Pick-up voltage 7.0V DC type)
	Min. switching capacity (resistive load)*1	1A 14V DC
Electrical characteristics	Insulation resistance (Initial)	Min. 100 MΩ (at 500V DC, Measurement at same location as "Breakdown voltage" section.)
	Breakdown voltage (Initial)	Between open contacts 500 Vrms for 1 min. (Detection current: 10mA)
		Between contacts and coil 500 Vrms for 1 min. (Detection current: 10mA)
	Operate time (at nominal voltage)	Max. 10ms (at 20°C 68°F, excluding contact bounce time) (Initial)
Mechanical characteristics	Release time (at nominal voltage)	Max. 10ms (at 20°C 68°F, excluding contact bounce time) (Initial) (without protective element)
	Shock resistance	Functional Min. 100 m/s ² {10G} (Half-wave pulse of sine wave: 11ms; detection time: 10μs)
		Destructive Min. 1,000 m/s ² {100G} (Half-wave pulse of sine wave: 6ms)
	Vibration resistance	Functional 10 Hz to 100 Hz, Min. 44.1 m/s ² {4.5G} (Detection time: 10μs)
		Destructive 10 Hz to 500 Hz, Min. 44.1 m/s ² {4.5G}, Time of vibration for each direction; X, Y direction: 2 hours, Z direction: 4 hours
Expected life	Mechanical	Min. 10 ⁷ (at 120 cpm)
	Electrical	<Resistive load> Min. 10 ⁵ (at nominal switching capacity, operating frequency: 1s ON, 9s OFF)
		<Motor load> Min. 10 ⁵ (25 A 14V DC at motor lock condition), operating frequency: 0.5s ON, 9.5s OFF
		<Lamp load> Min. 10 ⁵ (at 84 A (inrush), 12 A (steady), 14 V DC), Operating frequency: 1s ON, 14s OFF
Conditions	Conditions for operation, transport and storage*2	High heat-resistant type Ambient temperature: -40°C to +110°C -40°F to +230°F, Humidity: 2% R.H. to 85% R.H. (Not freezing and condensing at low temperature)
Mass		Approx. 7 g .25 oz

Notes: *1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

*2. The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Please refer to "Usage ambient condition" in CAUTIONS FOR USE OF AUTOMOTIVE RELAYS. Please inquire if you will be using the relay in a high temperature atmosphere (110°C 230°F).

*3. Depends on connection conditions. Also, this does not guarantee repeated switching. We recommend that you confirm operation under actual conditions.


REFERENCE DATA

1.-(1) Coil temperature rise (at room temperature)

Sample: ACTJ2H4, 3pcs.

Contact carrying current: 10A, 20A, 30A

Ambient temperature: Room temperature

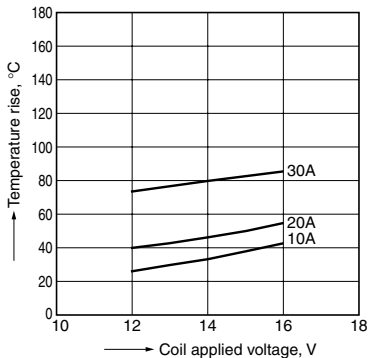


1.-(2) Coil temperature rise (at 110°C 230°F)

Sample: ACTJ2H4, 3pcs.


Contact carrying current: 10A, 20A

Ambient temperature: 110°C 230°F

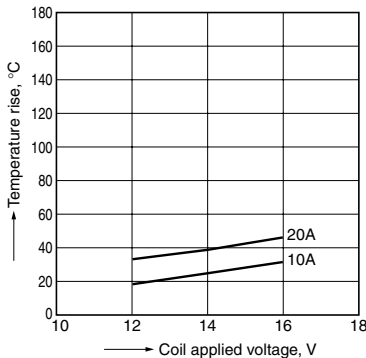

2. Ambient temperature and operating voltage range


Sample: ACTJ2H4

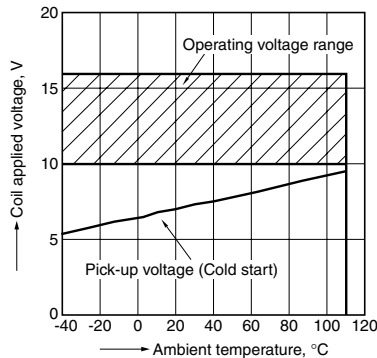

TJ (ACTJ)


3. Distribution of pick-up and drop-out voltage

Sample: ACTJ2H4, 40pcs.

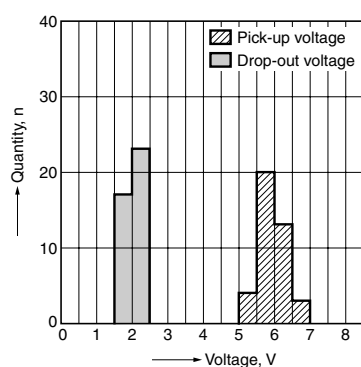

4. Distribution of operate and release time

Sample: ACTJ2H4, 40pcs.

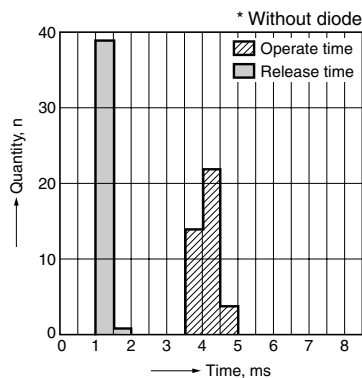

5.-(1) Electrical life test (Motor lock)

Sample: ACTJ2H4, 6pcs.


Load: 25A 14V DC

Power window motor actual load (lock condition)


Operating frequency: ON 0.5s, OFF 9.5s

Ambient temperature: Room temperature


Circuit:




Change of pick-up and drop-out voltage

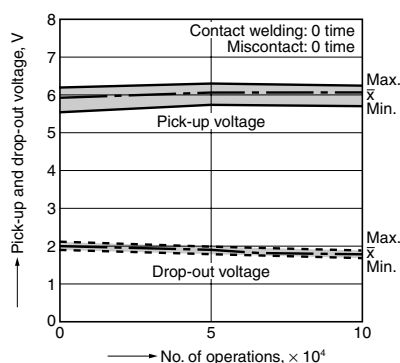

Change of contact resistance

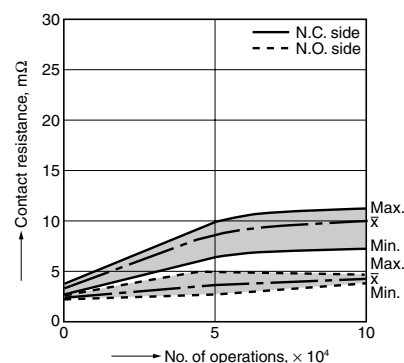

Load current waveform

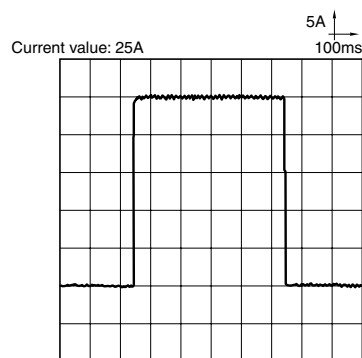

5.-(2) Electrical life test (Lamp load)


Sample: ACTJ2H4, 6pcs.

Load: inrush: 84A/steady: 12A 14V DC


Operating frequency: ON 1s, OFF 14s

Ambient temperature: Room temperature


Circuit:




Change of pick-up and drop-out voltage

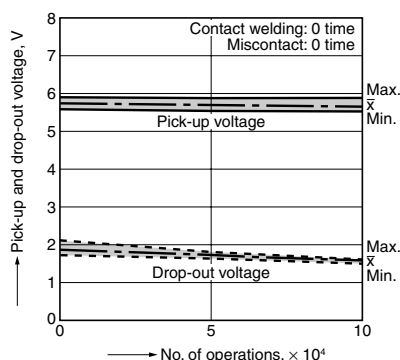

Change of contact resistance


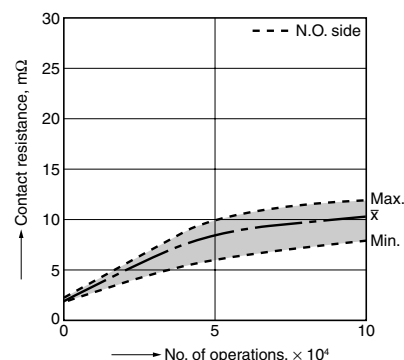


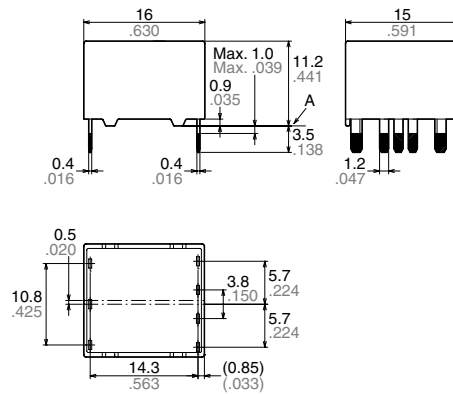DIMENSIONS (mm inch)**1 Form C type****External dimensions****Dimension:**

Less than 1mm .039inch:

Min. 1mm .039inch less than 3mm .118 inch:

Min. 3mm .118 inch:

Tolerance $\pm 0.1 \pm .004$ $\pm 0.2 \pm .008$ $\pm 0.3 \pm .012$ **PC board pattern (Bottom view)**Tolerance: $\pm 0.1 \pm .004$ **Schematic (Bottom view)**

* Dimensions (thickness and width) of terminal is measured before pre-soldering. Intervals between terminals is measured at A surface level.

NOTES**Usage, transport and storage conditions**

1) Ambient temperature, humidity, and atmospheric pressure during usage, transport, and storage of the relay:


(1) Temperature: -40 to $+110^{\circ}\text{C}$ -40 to $+230^{\circ}\text{F}$ (High heat-resistant type)

(2) Humidity: 2 to 85% RH (Avoid freezing and condensation.)

(3) Atmospheric pressure: 86 to 106 kPa

The humidity range varies with the temperature. Use within the range indicated in the graph below.

(Temperature and humidity range for usage, transport, and storage)

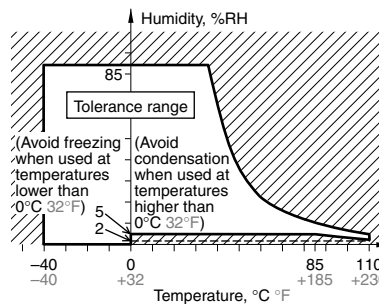

For general cautions for use, please refer to the “CAUTIONS FOR USE OF AUTOMOTIVE RELAYS”