



**BTA-16**



Φ12.0 x8.5(h)mm

ORDERING CODE: **B T A - 16**

① ② ③

① **Magnetic Buzzer**

② **Series Number**


③ **Coil Resistance**

| NO | SPECIFICATION              | DATA       |
|----|----------------------------|------------|
| 1  | Rated Voltage (V)          | 1.5        |
| 2  | Operating Voltage (V)      | 1~2        |
| 3  | Coil Resistance (Ω)        | 16±3       |
| 4  | Resonant Frequency (Hz)    | 2048       |
| 5  | *Sound Output at 10cm (dB) | Min 90     |
| 6  | *Current Consumption (mA)  | Max 50     |
| 7  | Operating Temperature (°C) | -20 ~ +70  |
| 8  | Storage Temperature (°C)   | -30 ~ +80  |
| 9  | Weight (g)                 | 1.3g       |
| 10 | RoHS                       | YES        |
| 11 | Packing Quantity           | 100pcs/box |

\*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

**DIENSIONS (unit : mm)**

Tolerance: ±0.5mm Except Specified

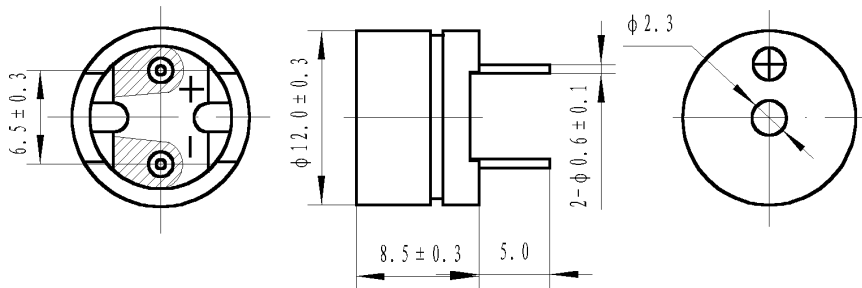



Φ12.0 x8.5(h) mm

# BTA-50

ORDERING CODE: **B T A - 50**

① ② ③

① **Magnetic Buzzer**

② **Series Number**

③ **Coil Resistance**

| NO | SPECIFICATION              | DATA       |
|----|----------------------------|------------|
| 1  | Rated Voltage (V)          | 1.5        |
| 2  | Operating Voltage (V)      | 1~2        |
| 3  | Coil Resistance (Ω)        | 50±5       |
| 4  | Resonant Frequency (Hz)    | 2048       |
| 5  | *Sound Output at 10cm (dB) | Min 90     |
| 6  | *Current Consumption (mA)  | Max 40     |
| 7  | Operating Temperature (°C) | -20 ~ +70  |
| 8  | Storage Temperature (°C)   | -30 ~ +80  |
| 9  | Weight (g)                 | 1.3g       |
| 10 | RoHS                       | YES        |
| 11 | Packing Quantity           | 100pcs/box |

\*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

**DIENSIONS (unit : mm)**

Tolerance: ±0.5mm Except Specified

