



Φ12.0 x 9.5(h) mm

# BTG-47

ORDERING CODE: **B T G - 47**

① ② ③

① Magnetic Buzzer

② Series Number


③ Coil Resistance

NO	SPECIFICATION	DATA
1	Rated Voltage (V)	5
2	Operating Voltage (V)	4~8
3	Coil Resistance (Ω)	45±5
4	Resonant Frequency (Hz)	2400±300
5	*Sound Output at 10cm (dB)	Min85
6	*Current Consumption (mA)	Max 40
7	Operating Temperature (°C)	-40 ~ +85
8	Storage Temperature (°C)	-40 ~ +85
9	Weight (g)	1.5g
10	Housing Material	PPO/Black
11	RoHS	YES
12	Packing Quantity	100pcs/box

\*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

**DIENSIONS (unit : mm)**

Tolerance: ±0.5mm Except Specified

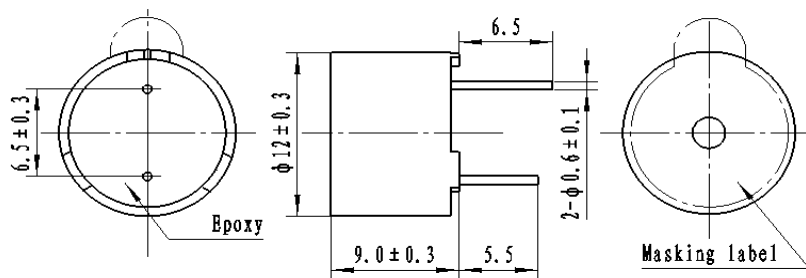



**BTG-140**



Φ12.0 x 9.5(h) mm

ORDERING CODE: **BTG - 140**

① ② ③

① Magnetic Buzzer

② Series Number

③ Coil Resistance

NO	SPECIFICATION	DATA
1	Rated Voltage (V)	12
2	Operating Voltage (V)	7~16
3	Coil Resistance (Ω)	140±10
4	Resonant Frequency (Hz)	2400±300
5	*Sound Output at 10cm (dB)	Min85
6	*Current Consumption (mA)	Max 40
7	Operating Temperature (°C)	-40 ~ +85
8	Storage Temperature (°C)	-40 ~ +85
9	Weight (g)	1.5g
10	Housing Material	PPO/Black
11	RoHS	YES
12	Packing Quantity	100pcs/box

\*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

**DIENSIONS (unit : mm)**

Tolerance: ±0.5mm Except Specified

