



BTN-0127



Φ9.0 x 4.0(h) mm

ORDERING CODE: **BTN - 0127**


①	②	③	④
①	Magnetic Buzzer		
②	Series Number		
③	Rated Voltage		
④	Rated Frequency		

NO	SPECIFICATION	DATA
1	Rated Voltage (V)	1.5
2	Operating Voltage (V)	1 ~ 2
3	Coil Resistance (Ω)	5.5±1
4	Resonant Frequency (Hz)	2731±300
5	*Sound Output at 10cm (dB)	Min 85
6	*Current Consumption (mA)	Max 100
7	Operating Temperature (°C)	-25 ~ +70
8	Storage Temperature (°C)	-30 ~ +80
9	Weight (g)	0.7g
10	Housing Material	PPO
11	RoHS	YES
12	Packing Quantity	100pcs/1box

*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

DIENSIONS (unit : mm)

Tolerance: ±0.5mm Except Specified

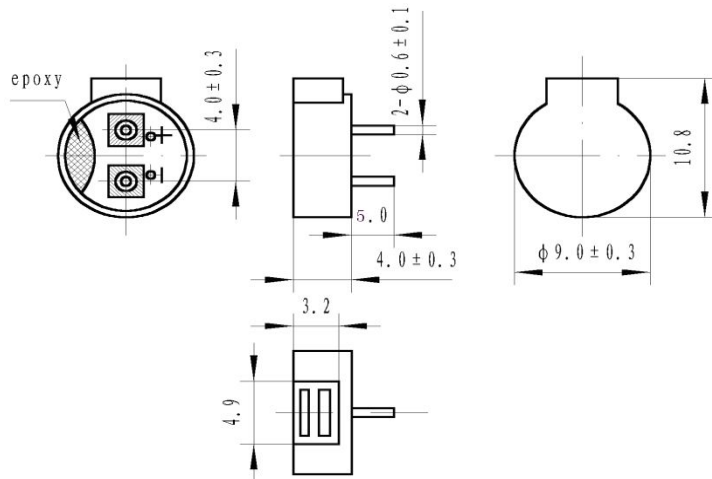



BTN-0327



Φ9.0 x 4.0(h) mm

ORDERING CODE: **BTN - 0327**

①	②	③	④
① Magnetic Buzzer			
② Series Number			
③ Rated Voltage			
④ Rated Frequency			

NO	SPECIFICATION	DATA
1	Rated Voltage (V)	3
2	Operating Voltage (V)	2~5
3	Coil Resistance (Ω)	16±3
4	Resonant Frequency (Hz)	2731±300
5	*Sound Output at 10cm (dB)	Min 90
6	*Current Consumption (mA)	Max 80
7	Operating Temperature (°C)	-25 ~ +70
8	Storage Temperature (°C)	-30 ~ +80
9	Weight (g)	0.7g
10	Housing Material	PPO
11	RoHS	YES
12	Packing Quantity	100pcs/1box

*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

DIENSIONS (unit : mm)

Tolerance: ±0.5mm Except Specified

