

SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	1 of 15		Date	Nov. 15, 2013	

- FUNCTIONS

Rotation Detecting for 4 directions in vertical mode

- APPLICATIONS

1. Screen rotation for portable 3C products




- FEATURES

1. Housing made of high insulation plastic material, free from electric conduction and rust problem.
2. Detecting with photo transistors, not affected by metal oxidization or wear. Possesses highly reliable and stable signals.
3. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
4. Simple ON and OFF signals, easy for design.
5. Suitable to vertical PCB.
6. RoHS compliance, an ideal substitute for mercury switch.
7. A more economical tilt and rotation detection option than IC design solution.
8. All made in Taiwan and examined before shipment.

- PATENTS

1. Taiwan utility model Patent No. M 397113
2. China utility model Patent No. ZL 2010 2 0272893.2
3. Japan Patent No. 5281060




SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	2 of 15		Date	Nov. 15, 2013	


● DIMENSIONS / ANGLE RANGE / P.C.B. LAYOUT (Unit: mm, Tolerance: ±0.20mm)

Fig. 1

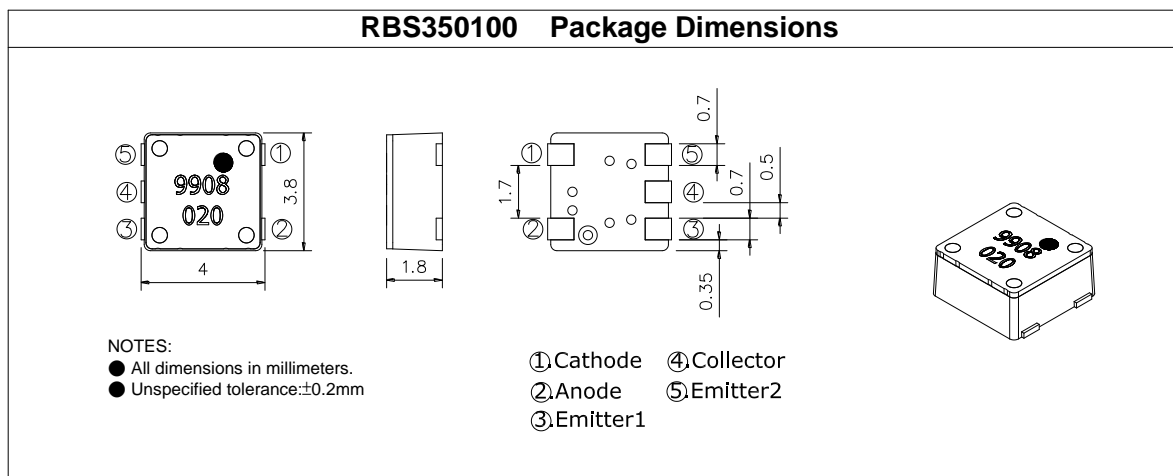

● PACKING ICON OF TAPE & REEL

Fig. 2

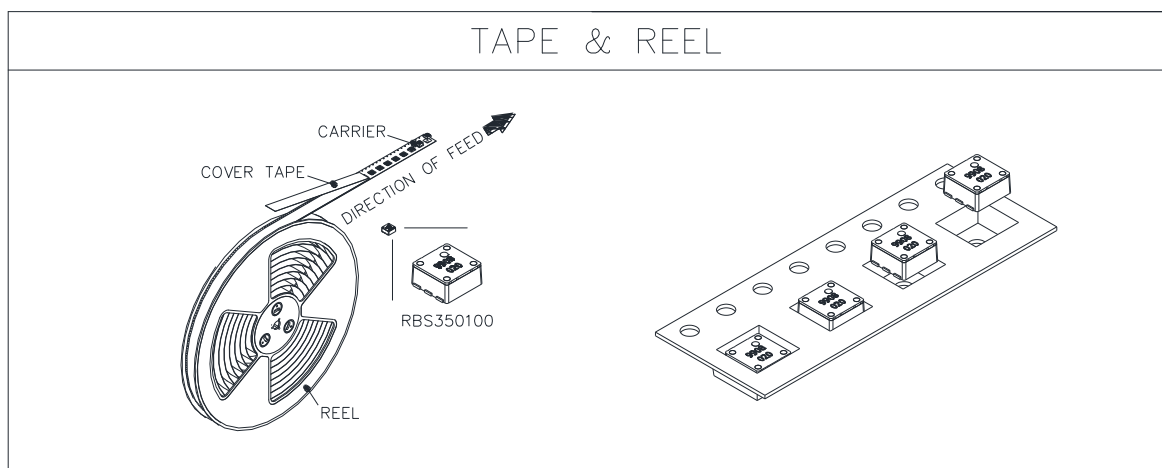

SENSOR SWITCH





Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	3 of 15		Date	Nov. 15, 2013	



● Tilt angle range

I. Clarification:

1. element with respect to the space Z axis inclination angle α is within 30° , can be normal actuation.
2. Component rotation angle Θ exceeding 75° , the output signal will be switched1.

II. Fig. 3


	E1	E2
	0	1
	0	0
	1	0
	1	1

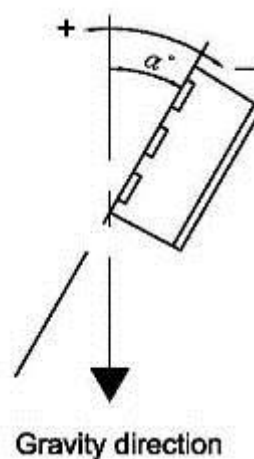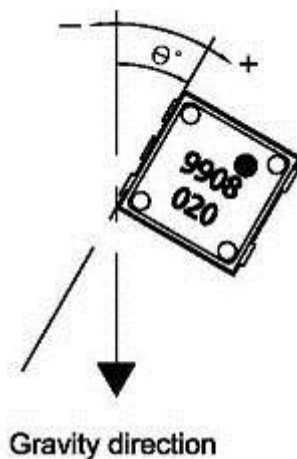


SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	4 of 15		Date	Nov. 15, 2013	

III. Fig. 4

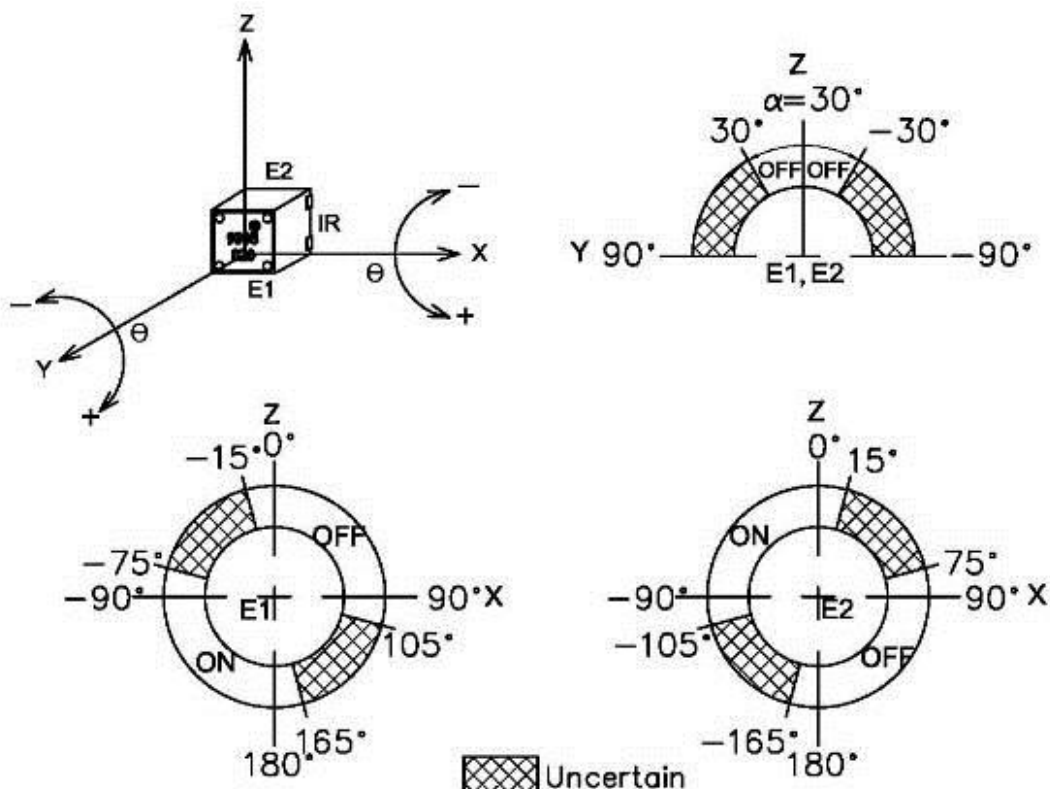

P C B Layout (SMD) / Installation

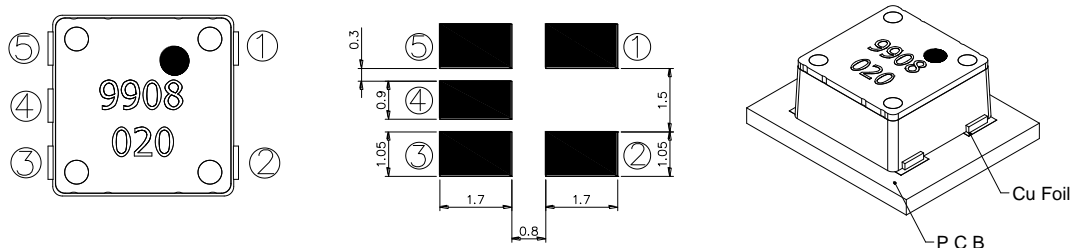


SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	5 of 15		Date	Nov. 15, 2013	

● CIRCUIT SUGGESTED

Application Circuit

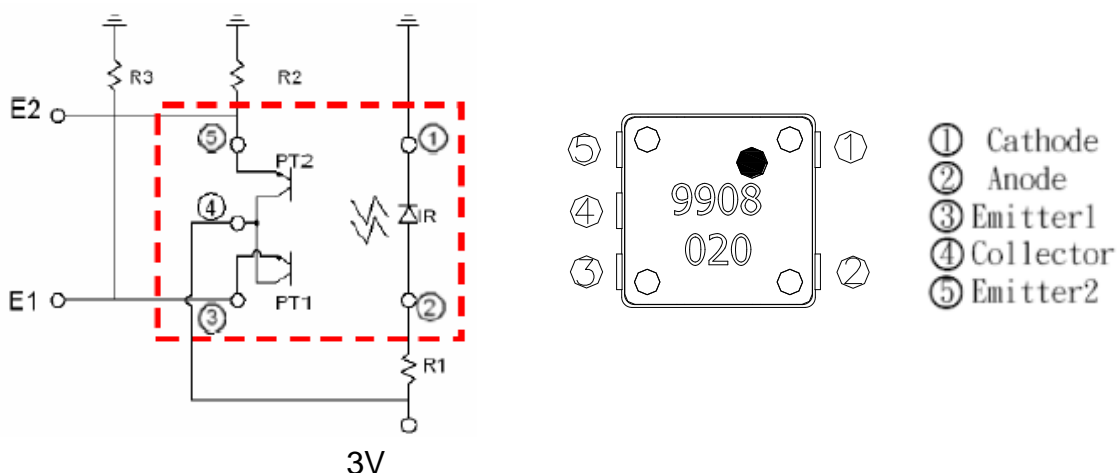

Note :

E1 : Output current of phototransistors PT1

E2 : Output current of phototransistors PT2

ON : Output current of phototransistors : 100 μ A or more

OFF : Output current of phototransistors : 20 μ A or less

Output current of ON/OFF is output when device is at a standstill



SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	6 of 15		Date	Nov. 15, 2013	

● Recommended current and voltage

Input Current (mA)	Operating Voltage (V)	Conditions
3.5	3	$V_{CE}=3V$ $R_D=510\text{ ohm}$ $R_L=10K\text{ ohm}$

● Absolute Maximum Rating ($T_a=25^{\circ}C$)

Item		Symbol	Rating	Unit
Input	Power Dissipation	P_d	75	mW
	Reverse Voltage	V_R	5	V
	Forward Current	I_F	50	mA
	Peak Forward Current (*1)	I_{FP}	1	A
Output	Collector Power Dissipation	P_C	100	mW
	Collector Current	I_C	20	mA
	C-E Voltage	V_{CEO}	30	V
	E-C Voltage	V_{ECO}	5	V
Operating Temperature		T_{opr}	-25~+85	$^{\circ}C$
Storage Temperature		T_{stg}	-40~+85	$^{\circ}C$
Soldering Temperature (*2)		T_{sol}	260	$^{\circ}C$

(*1) $t_w=100\text{ uSec.}$ 、 $T=10\text{ mSec.}$

(*2) $t=5\text{ Sec}$



SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	7 of 15		Date	Nov. 15, 2013	

● Optical/Electrical Characteristics (Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	V_F	$I_F=20\text{mA}$	-	1.25	1.3	V	
	Reverse current	I_R	$V_R=5\text{V}$	-	-	10	μA	
*1 Output	Collector dark current	I_{CE}	$V_{CE}=20\text{V}$	-	-	50	nA	
*1 Coupling Characteristics	Collector current	I_C	$V_{CE}=2.8\text{V}, R_1=470\Omega$	100	-	-	μA	
	*2 Leak current	I_{LEAK}	$V_{CE}=2.8\text{V}, R_1=470\Omega$	-	-	20	μA	
	Response Time	Rise time	t_r	$V_{CE}=2.8\text{V}, I_C=100\mu\text{A}$ $R_L=1000\Omega$	-	50	150	us
		Fall time	t_r		-	50	150	us
Collector-emitter Saturation voltage		$V_{CE(sat)}$	$I_F=2\text{mA}, I_C=100\mu\text{A}$	-	-	0.3	V	

*1 Output and coupling characteristics are common to the both phototransistors.

*2 Leak current is the output of transistor when $\theta=0^\circ$ or $\pm 90^\circ$, $\phi=0^\circ$ and $I_C=OFF$.



SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	8 of 15		Date	Nov. 15, 2013	

● Typical Electrical / Optical Characteristics Curves (Ta=25°C)

Fig.1 Power Dissipation vs. Ambient Temperature

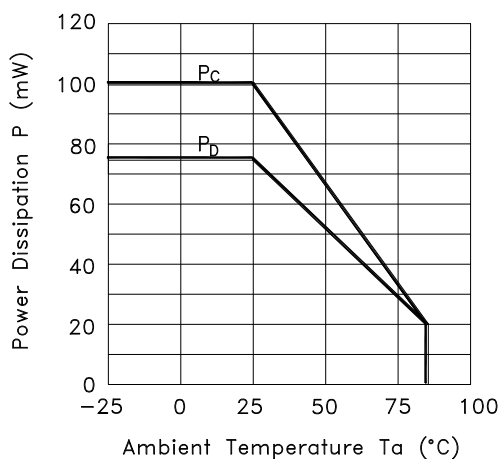


Fig.2 Forward Current vs. Forward Voltage

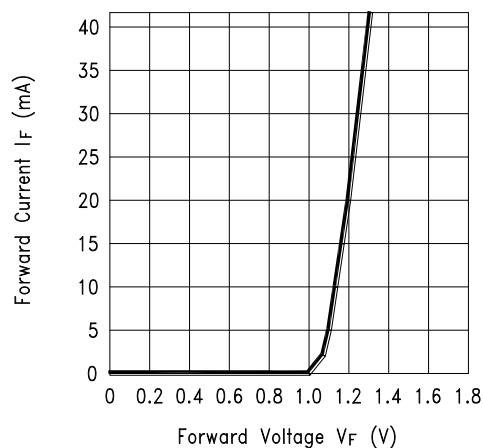


Fig.3 Collector Current vs. Collector-emitter Voltage


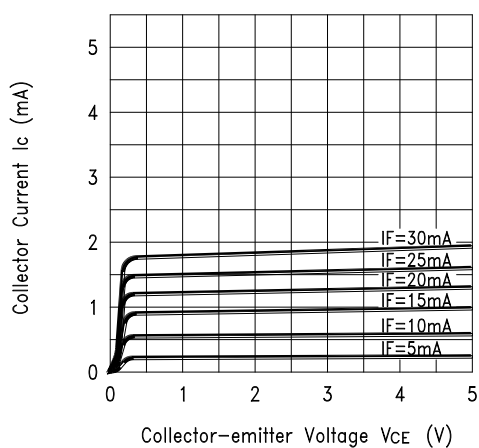


Fig.4 Collector Current vs. Ambient Temperature

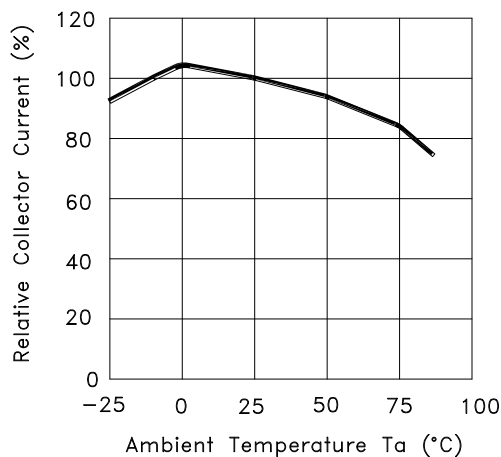

SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	9 of 15		Date	Nov. 15, 2013	

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

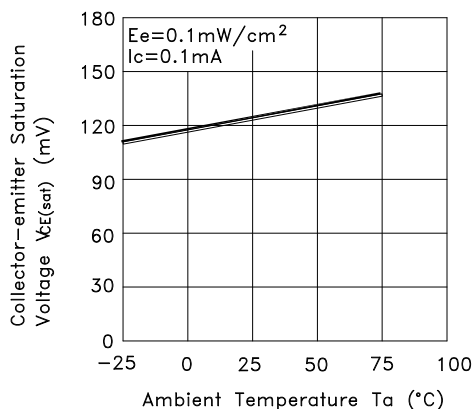


Fig.6 Response Time vs. Load Resistance



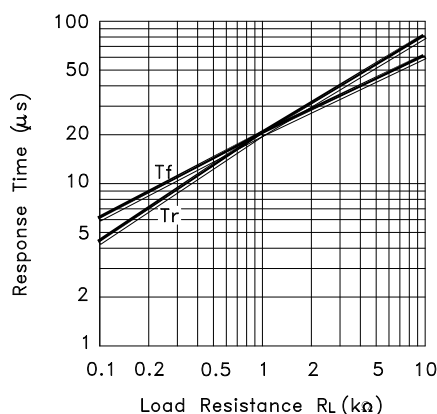



Fig.7 Sensing Position Characteristics (Typical)

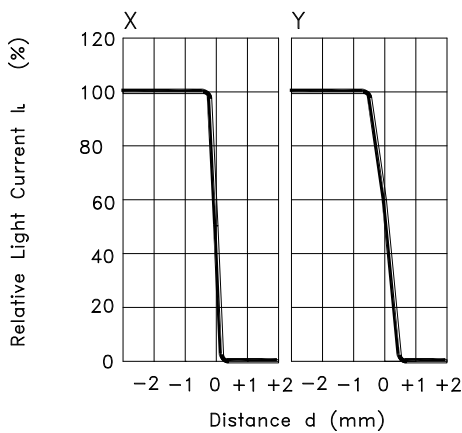

(Center of Optical axis)



Test Circuit for Response Time

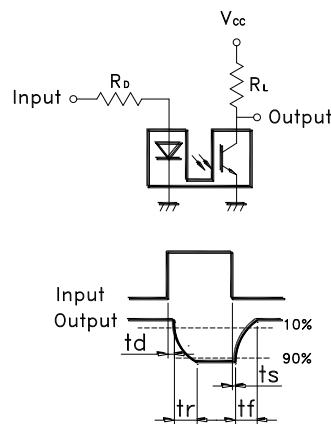

SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	10 of 15		Date	Nov. 15, 2013	

● ELECTRICAL CHARACTERISTICS

1.	Contact Rating	--
2.	Contact Resistance	--
3.	Differential Angle	Refer to Fig. 4
4.	Insulation Resistance	--
5.	Dielectric Strength	--
6.	Capacitance	--

● RELIABLE TEST ITEMS

Test Item	Standard	Contents
IR Reflow	MIL-STD-202G, TEST METHOD 210F, IPC/JEDEC J-STD-020D	Peak temp.=255~260°C *3times
Operating Temperature	MIL-STD-202G, TEST METHOD 107G, TEST A	-25°C~85°C
Storage Temperature	MIL-STD-202G, TEST METHOD 107G, TEST A	-40°C~85°C
Humidity	MIL-STD-202G, TEST METHOD 103B	40°C/95%RH
Mechanical Life	--	2Hz, horizontal 1,000,000 times
Electrical Life	MIL-STD-883E:1016	I _F =20 mA, V _{CE} =5 V TIME: 30,000 hrs



SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	11 of 15		Date	Nov. 15, 2013	

● SOLDERING CONDITION

Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

Condition Operation Method	Soldering Temperature	Soldering Time	Wattage of Manual Soldering	Suitable Production Process
IR Reflow	Please refer to following < Table of classification Reflow profile > and Fig. 4		-	SMT
Wave Soldering	260±5°C	< 5 seconds max.	-	DIP
Manual Soldering	260±5°C	< 5 seconds max.	20W or Temperature-controlled manual soldering	DIP · SMT



SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	12 of 15		Date	Nov. 15, 2013	

< Table of classification Reflow profile >


Item	Pb process	Pb free process
Pre-heat and Soak Temperature min.(T _{smin})	100 °C	150 °C
Temperature max.(T _{smax})	150 °C	200 °C
Time (T _{smin} to T _{smax})(t _s)	60-120 seconds	60-120 seconds
Average ram-up Rate (T _{smax} to T _p)	3 °C/second max.	3 °C/second max.
Liquidous Temperature (TL) Time at Liquidous (tL)	183 °C 60-150 seconds	217 °C 60-150 seconds
Peak package body Temperature (T _p)*	230 °C ~235 °C *	255 °C ~260 °C *
Classification temperature(T _c)	235 °C	260 °C
Time(tp)** within 5 °C of the specified classification temperature (T _c)	20** seconds	30** seconds
Average ram-down Rate (T _p to T _{smax})	6 °C/second max.	6 °C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.
* Tolerance for peak profile temperature (T _p) is defined as a supplier minimum and a user maximum. ** Tolerance for time at peak profile temperature (tp) is defined as a supplier minimum and a user maximum.		



SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	13 of 15		Date	Nov. 15, 2013	

Fig. 4

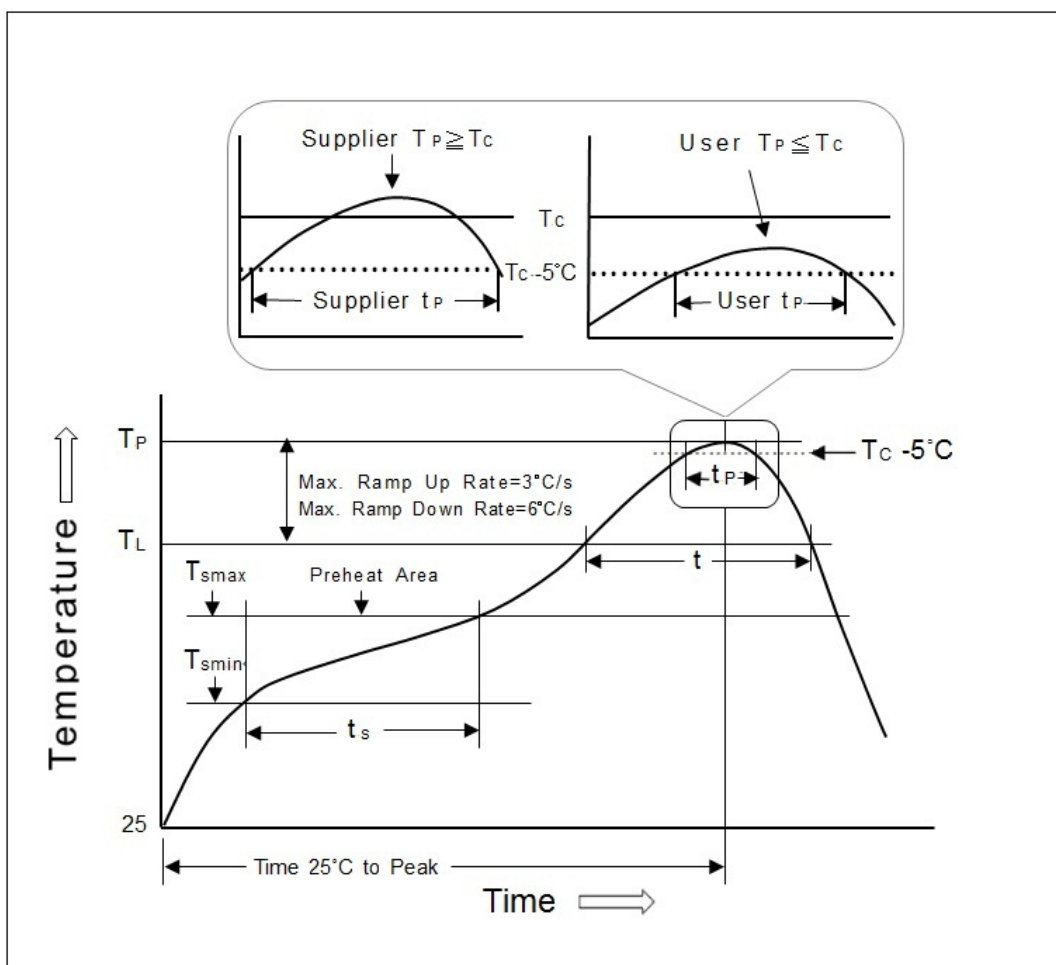

SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	14 of 15		Date	Nov. 15, 2013	

● PACKAGE

	Part Number	Package	Quantity	Total	Dimension
1.	RBS350100T	Tape & reel	3,600 pcs	3,600 pcs	φ300*17H
		Inner box	3 reels	10,800 pcs	360L*340W*70H
		Carton(1)	4 boxes	43,200 pcs	370L*360W*310H
		Carton(2)	10 boxes	108,000 pcs	700L*360W*380H

※ Package shown as below for reference.



Tape & reel



Pumping vacuum bag



Inner box



Carton



SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	15 of 15		Date	Nov. 15, 2013	

● NOTE:

I. Design:

1. Caution should be taken not to overload with instantaneous voltage at the turning ON and OFF of the circuit.
2. When using the pulse drive care must be taken to keep the average current with the rate figures.
3. Avoid close to or direct circuit connect to magnetic devices. (ex: Relay, transformer ...and so on)
4. Don't try to clean the switch with a solvent or similar substance after the soldering process.
5. The switch might be damaged if using the water-soluble flux.

II. Storage:

1. In order to avoid the absorption of moisture, it is recommended to solder as soon as possible after unpacking the sealed bag.
2. If the bag is still sealed, to store it in the environment as following:
 - (1) Temperature: 5°C - 30°C (40°F) ;
Relative humidity: RH 60% MAX.
 - (2) After the packaging bag is opened to perform the IR reflow or soldering process, the necessary conditions are as below:
 - a. Completed within 168 hours
 - b. Stored at less than 30% RH.
 - (3) If parts is being unable to conform to condition of (2)a or (2)b, it must be baking before it goes to welding again.
 - (4) If baking is required, device must be baked under below condition:
48 hours at 60°C +/-3°C.



SENSOR SWITCH

Item No.	RBS350100T	Description	TILT SWITCH	Version	6
Page	16 of 15		Date	Nov. 15, 2013	

III. Others:

1. If the products is intended to be used for other endurance equipment requiring higher safety and reliability such as life support system, space and aviation devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. To prevent damaging IR and PT, please make electrostatic protective treatment, for example: wearing a conductive wrist strap or antistatic gloves during production process \ grounding machinery etc.

● Remark:

For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.

