


WATER PROOF SWITCHES

DIMENSIONS

Unless otherwise specified, a tolerance of $\pm 0.4\text{mm}$ applies to all dimensions.

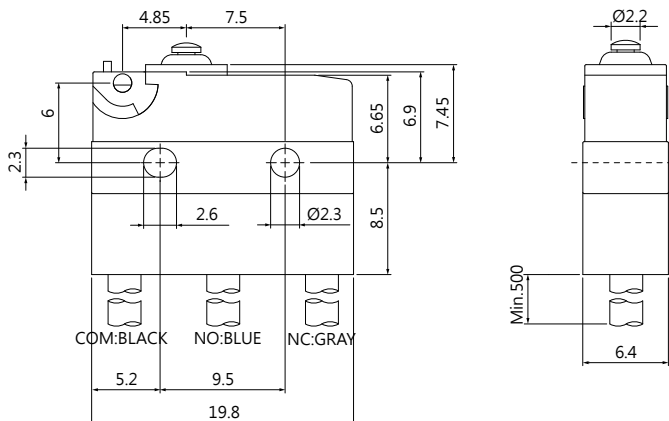

SW (IP67) SERIES

APPLICATIONS :

Automotive Door Latch, Coffee Machine, Steamer, Telephone, Air Conditioner, Humidifier, Alarm, Time Recorder, Security Device, Mixer & Chopper, Solder Gun, Neon Phone, Fax Machine, Joystick, Water Pump, Gas Detector, Pencil Sharpener, Money Sorter, Food Processor, Electric Knife, Toy Car, Juice Maker, Electric Steak Pan

SPECIFICATIONS

Contact Resistance(initial)

Max. 30 m Ω

Insulation Resistance(at 500 VDC / minute)

Min. 100 M Ω

Dielectric Strength

1000 VAC(50~ 60 Hz)

Electrical Service Life

Min. 10,000 operations

Electrical Operating Frequency

10~30 operations per minute

Mechanical Service Life

Min. 2,000,000 operations

Mechanical Operating Frequency

120 operations per minute

CERTIFICATE INFORMATION

Model Name	UL, cUL	ENEC14
SW-05S	0.1A/5A 30VDC 0.1A/5A 125/250VAC μ T120,1E4	6A 250VAC, μ T70 1E4 (PVC cable) 6A 250VAC, μ T120 1E4 (High heat resistant cable or bare Terminal)

ORDERING INFORMATION

