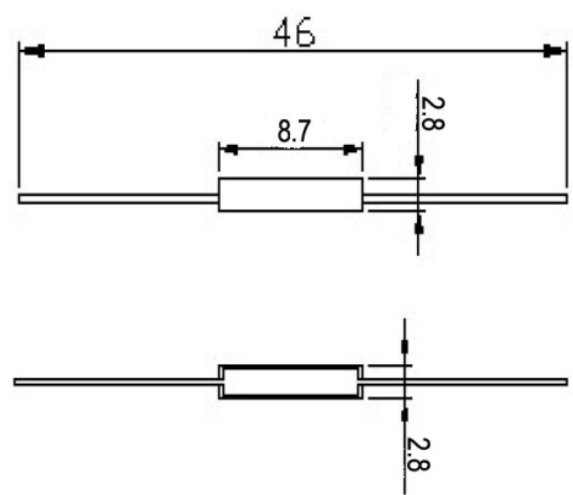
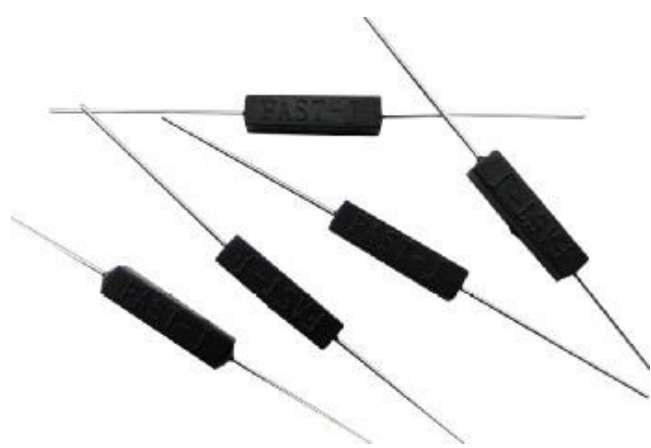



PCB Mount Reed Switch

Product Name		Normally Open Reed Sensor		Item No.	SZFAST-M 
					
Switch Circuit	Switch Form	Built-in reed switch		Feature: 1. Operated in magnetic field. 2. Sensitive distance is optional 3. 2 pins Advantages: 1. Easy installation. 2. Passive switch, no need outer power 3. It can cut through any non-irony materials.	
	Form A	RI-70SFA φ1.8×5mm			
Contact Form		1A SPST-NO		Breakdown voltage	210V
Contact Materials		Ru		Contact capacity	0.35pF
Contact Load		10W		Insulated resistance	10 ¹² Ω
Max. switching voltage		DC170V/AC120V		resonant frequency	17.9KHz
Max. switching current		0.5A		Work temperature	-55℃～+100℃
Max. contact resistance		120m Ω		Pull in value	AT9-21
Approve		Drawing		check	version release
ROHS\REACH\CE		Yan Guo		Leo Li	2012-1-30
SHENZHEN FAST SENSOR CO.,LTD http://www.szfast.com			TEL: 0755-3393 6919 FAX: 0755-3393 6682 Sophy Deng E-mail: sophy@faster.hk		

SZFAST-A NO	SZFAST-B NO	SZFAST-C NO	SZFAST-D NO
SZFAST-E NO	SZFAST-EB NB	SZFAST-EC CO	SZFAST-F NO
SZFAST-G NO	SZFAST-H NO	SZFAST-J NO	SZFAST-J1 NO
SZFAST-M NO	SZFAST-R1105 NO	SZFAST-R1503 NO	SZFAST-R1505 NO